


CDP-1110CE Environmental Mini PTZ Dome



- 3 1/2" full feature PTZ
- Vandal resistant aluminum body with polycarbonate lower dome
- Housing is IP66 rated weatherproof
- Built-in thermostatically controlled heater element allows operation down to -10°F
- 1/4" Exview HAD CCD, with more than 480 lines of resolution
- 10x optical zoom, plus 10x digital, for 100x total zoom capability
- User selectable auto flip feature
- 165 presets, with up to 8 selectable group tours (up to 60 individual presets each)
- Variable speed pan and tilt stepper motors (200°/sec max)
- Works with popular control protocols
- Mounting options include wall, ceiling or surface
- Convenient 24vAC operation

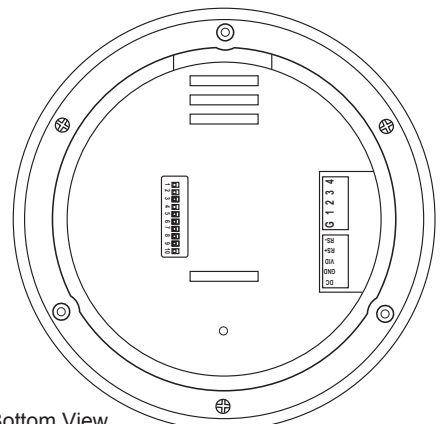

Bottom View

* Quick connect harness included



Product Data: CDP-1110CE Environmental Mini PTZ Dome

Model Number		CDP-1110CE (10x Zoom)	
Mechanical	Pan Rotation Angle	360° Endless	
	Pan Speed	Manual	100 ~ 200° / Sec. (64 Step)
		Preset	Max 200° / Sec.
	Tilt Rotation Angle	0 ~ 90°	
	Tilt Speed	Manual	100 ~ 200° / Sec. (64 Step)
		Preset	Max 200° / Sec.
System Accuracy		0.024°	
Functions	Presets	165 positions with a 16 character label available for each position with different speed steps	
	Group Tour	Max 8 Programmable Group Tours (each one consisting of up to 60 preset steps)	
	Auto Scan	Programmable Auto Scan	
	Sector	8 Selectable Sectors with 16 Characters	
	Password Protection	Yes	
	Alarm Actions	Activate Preset or Group Scanning	
	Auto Flip	On / Off	
	OSD Menu	Multiple Languages On Screen	
	Communication	RS-485	
	Protocol	Pelco P and D	
Electrical	Power Consumption	10 Watt Max	
	Power Supply	18-32vAC, 60/50Hz	
	Fuse	1.25 Amp (Dome Drive)	
	Alarm Input	4 Alarm (Off / NC / NO)	
Construction	Construction	Vandal Proof Body (Aluminum), Dome (Polycarbonate)	
	Dimensions	6.5" D x 6.25" H Body, 3.5"D Lower Dome	
	Weight	2.5 Lbs Dome, 2 Lbs Back Box	
	Motor Type	Stepper Motor	
	Operating Temperature	-10°F ~ 135°F	
	Certifications	IP66, CE, FCC	
Camera Module	Image Sensor	1/4" Sony Exview HAD CCD	
	Number of Effective Pixels (NTSC)	768 H x 494 V, 380K	
	Horizontal Resolution	More Than 480 TV Lines	
	Lens	Optical	10x Optical Zoom (F1.8, F=3.6 - 36mm)
		Digital	10x (100x with Optical)
	Minimum Shooting Distance	0.32mm (Wide) 1.5mm (Tele)	
	Digital Slow Shutter	On / Off	
	Min. Illumination	2.5 Lux, F1.8	
	Luminance S/N Ratio	More Than 52dB	
	Video Output	VBS: 1.0v p-p (Sync Negative), Y/C Output	
	BLC	On / Off	
	Flickerless Mode	On / Off (1/100)	
	White Balance	AWB / ATW / Indoor / Outdoor	

Specifications subject to change

