


CDVS-7532

Digital Video Recorder




- 32 video inputs with looping outputs
- MPEG4 compression / real-time display
- 720 x 480 (4 CIF) resolution
- 960fps display and 480fps record rates
- 16 audio channels
- Two-way communication
- Listen to live and recorded audio at DVR and remotely
- Spot monitor output
- 16 input sensors and 16 output controls
- Multi-zone motion detection for every camera
- Adjustable sensitivity per motion zone
- Up to 3.0TB of internal Cool Drive storage
- Multiplatform remote software allows administration of digital and embedded DVRs
- Complete remote administration
- Quad Plex – view live, replay video, record video and back-up video
- Allows all 32 cameras to be viewed simultaneously

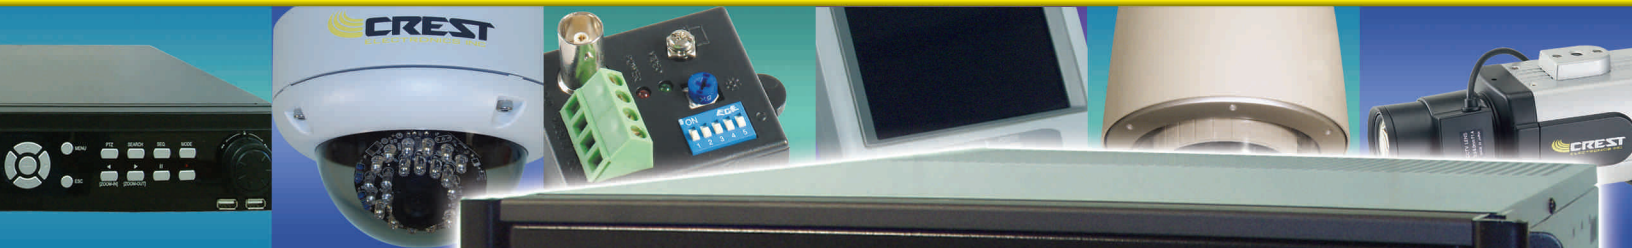


Video Security Since 1974

Product Data: CDVS-7532 Digital Video Recorder

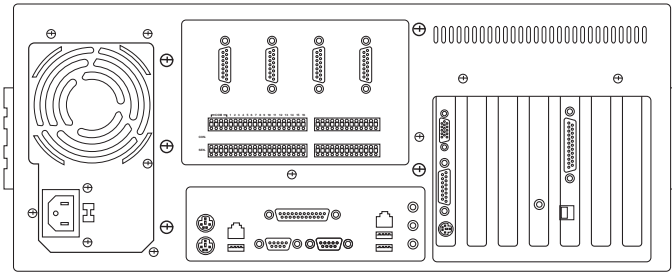

Rack Mount Unit, Rear Panel

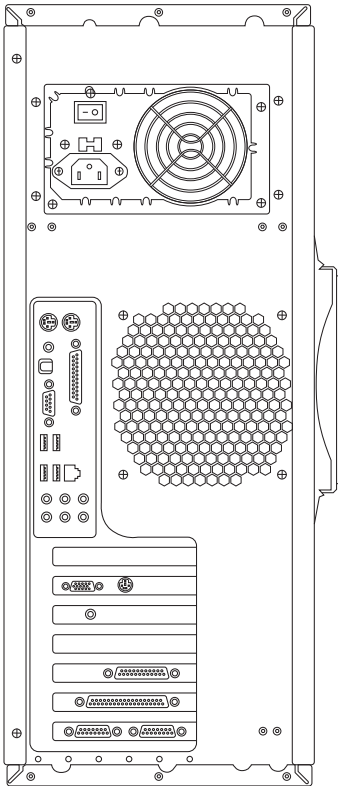

PC Tower, Rear Panel

Model Number	CDVS-7532
Camera Inputs	32 (BNC Type)
Looping Outputs	Yes (32 Ch)
Audio Inputs	16 (RCA Type)
Video Outputs	PC Monitor (VGA) / Analog Monitor
Screen Division	1 / 4 / 6 / 8 / 9 / 10 / 13 / 16 / 25 / 32
Display Speed	960FPS (Real-Time)
Recording Speed	480FPS (Max)
Resolution	360 x 240 (1CIF) / 720 x 240 (2CIF) / 720 x 480 (4CIF)
Available Recording Rates	360 x 240 - 480FPS (Max) / 720 x 240 - 240FPS (Max) / 720 x 480 - 120FPS (Max)
Compression Type	MPEG4
Sensor & Relay	16 Sensor Inputs / 16 Relay Outputs
PTZ Control	RS-485 / RS-422 / RS-232C
Network	10 / 100 Base TX Ethernet / Modem (Optional)
HDD Capacity	Up to 3.0TB Internal
Compressed File Size	360 x 240 (1~5kb) / 720 x 240 (2~10kb) / 720 x 480 (4~20kb)
Recording Mode	Continuous / Motion Detection / Sensor / Sensor or Motion / Emergency
Recording Schedule	Schedule Recording Mode by Camera / Day / Hour (Individual Settings)
Remote Transmission	Live Video / Replay / Remote Storage / Notification of Events
Remote Control	PTZ / Emergency Recording / Relay Output / Administration
Storage Temp / Humidity	-4 ~ 140°F / 20 ~ 95% RH
Operation Temp / Humidity	41 ~ 104°F / 20 ~ 80% RH

Specifications subject to change without notice

